
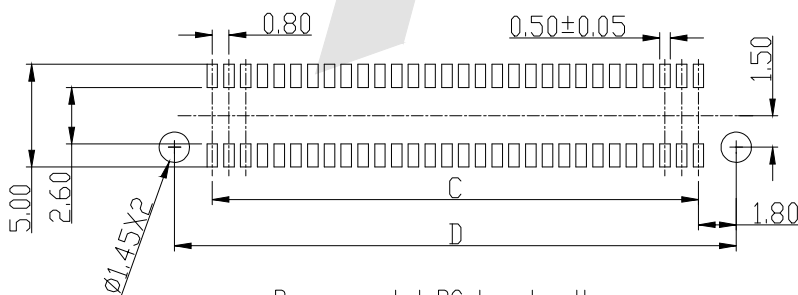
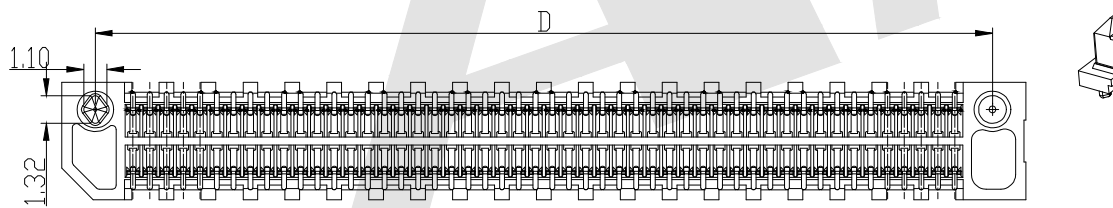
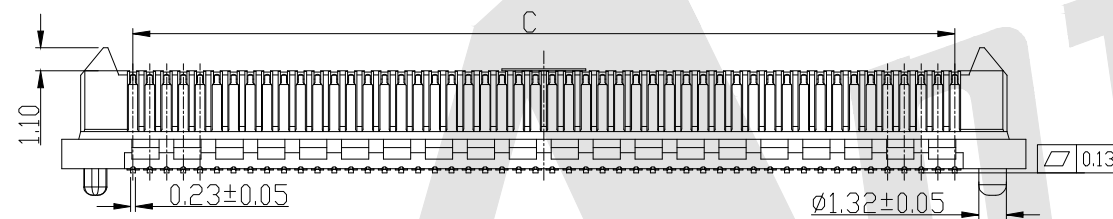


Specif tiom
 1 Current Rating:1.0A AC/DC
 2 Voieage Rating:300V AC/DC
 3 Operating Temperature:-55° C To +125° C
 4.Operating Humidity:90% To 95%
 5.Withstanding Voltage:500VAC

Ordering Code:




BB0.8 - M - H - X - X - X - 03
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series NO:
0.8mm Board to Board connector
- ② M:Male F:Female
- ③ BB0.8M Height:
H:2=5.97mm
H:5=8.91mm
H:8.0=11.91mm
H:9.0=12.91mm
- ④ NO. of Contacts:
See Table
For Example
24:24poles
- ⑤ Contact Plating
G0: Gold flash
G1: 3u" Gold
G2: 5u" Gold
G3: 10u" Gold
G4: 15u" Gold
G5: 30u" Gold
SN:Tin
- ⑥ Packing
T:Tube A:Tray
B:Bag U:Tube+CAP
R:tape&Reel
W:tape&Reel+CAP
- ⑦ serial number: 03

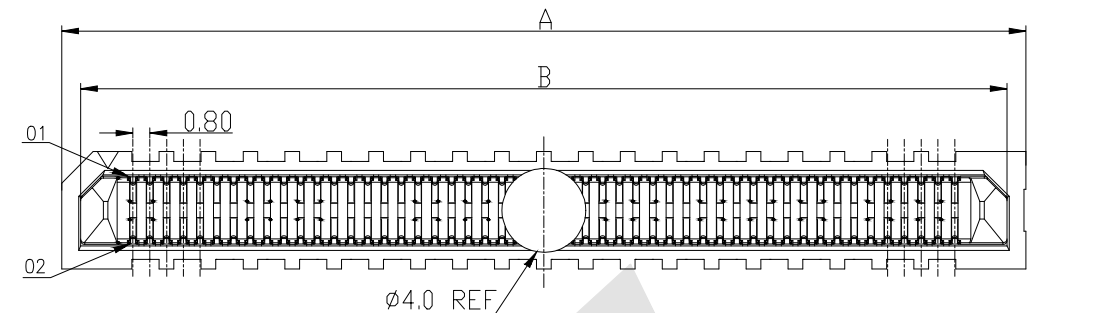

Recommended PC board pattern
(TOP VIEW)

BB0.8M LEAD STYLE	MATED HEIGHT		
	BB0.8F	LEAD	STYLE
	5.0	7.0	9.0
2.0	7.00	9.00	11.00
5.0	10.00	12.00	14.00
8.0	13.00	15.00	17.00
9.0	14.00	16.00	18.00

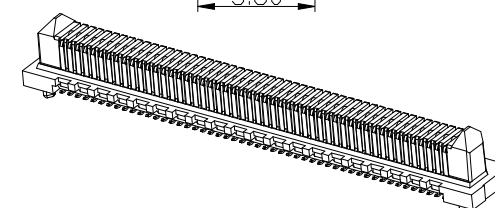


HEIGHT	H	H1
2.00	1.61	5.97
5.00	4.61	8.91
8.00	7.61	11.91
9.00	8.61	12.91

POSITION	A	B	C	D
10	10.00	8.32	3.20	6.80
20	14.00	12.32	7.20	10.80
22	14.80	13.12	8.00	11.60
24	15.60	13.92	8.80	12.40
26	16.40	14.72	9.60	13.20
30	18.00	16.32	11.20	14.80
40	22.00	20.32	15.20	18.80
50	26.00	24.32	19.20	22.80
60	30.00	28.32	23.20	26.80
80	38.00	36.32	31.20	34.80
100	46.00	44.32	39.20	42.80
120	54.00	52.32	47.20	50.80
140	62.00	60.32	55.20	58.80
150	66.00	64.32	59.20	62.80
200	86.00	84.32	79.20	82.00

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm
 DRAW Wu Feng Rong DATE 11/28/2020
 CHECK BobYang DATE 11/28/2020



Antenk® ANTENK ELECTRONICS CO.,LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

TITLE:
0.8mm Board to Board Connector Male Plug

DRAWING NO: BB0.8M-HXXX03
 PRODUCT NO: BB0.8M-HXXX03

REV	DESCRIPTION				DATE